




ProTone S

THREE WAY TRI-AMPED LINE ARRAY ELEMENT




Specifications

| | |
|-----------------------------|---|
| Speaker component | Low 2x18" 460MM, Mid 6x6" 165MM, Hi 4x2" 50MM |
| Frequency Response, Hz -3dB | 35-18000 |
| Power handling, w(AES) | 2600/1500/320 |
| Horizontal Coverage | 90 |
| Vertical Coverage | 6 |
| Sensitivity, db | 100/105/116 |
| SPL 1W/Peak @ 1m | 132/135/140 |
| Impedance, ohm | 2x8/8/8 |
| Conector | 2xNeutrik Speakon NL8 |
| Size HxWxD mm | 568x1320x700 |
| Weight, kg | 123 |

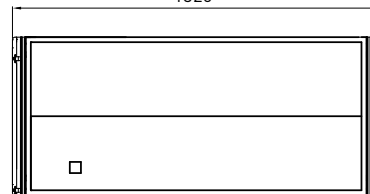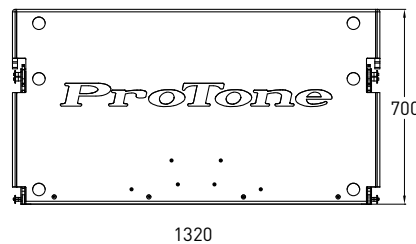


Frequency response

SPL vs Freq

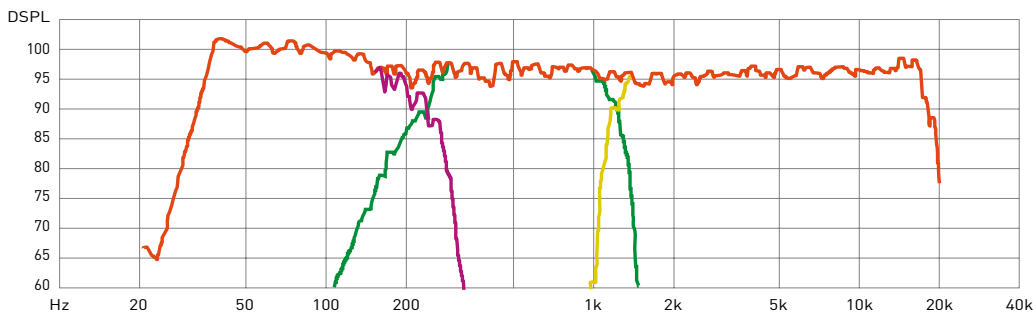

Phase response

Phase

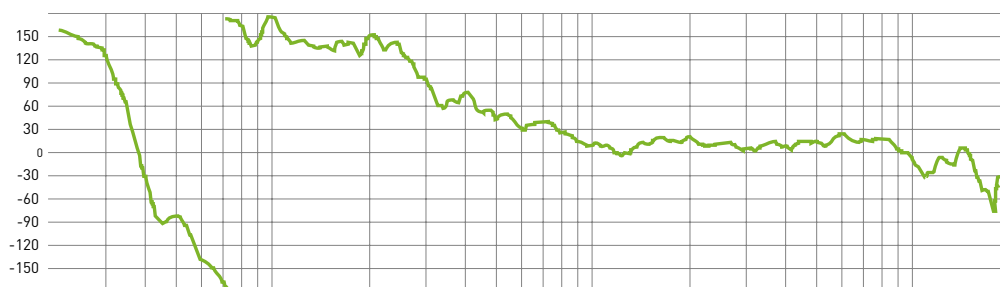

ProTone

9 «а» Severnoye Shosse, Krasnoyarsk, Russia.

Tel.: +7 (391) 269-59-40, 269-59-90, www.protone.ru, e-mail: info@protone.ru