



# ProTone T35

## 3-WAY 3-AMPED LINE ARRAY ELEMENT




### Specifications

|                                |   |
|--------------------------------|---|
| Speaker component              | Low 2x15" 380mm,<br>Mid 4x6" 165mm,<br>Hi 3x2" 50mm |
| Frequency Response,<br>Hz -3dB | 35-18000  |
| Power handling, w(AES)         | 2200/1000/240                                       |
| Horizontal Coverage            | 90  |
| Vertical Coverage              | 5   |
| Sensitivity, db                | 101/103/115   |
| SPL 1W/Peak @ 1m               | 131/133/139   |
| Impedance, ohm                 | 2x8/8/24  |
| Conector                       | 2xNeutrik<br>Speakon NL8                            |
| Size HxWxD mm                  | 436x1320x510  |
| Weight, kg                     | 94  |

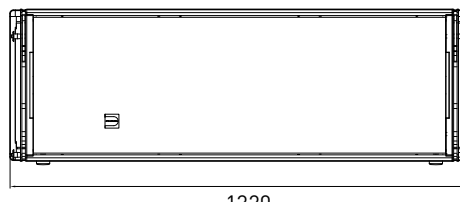


### Frequency response

#### SPL vs Freq

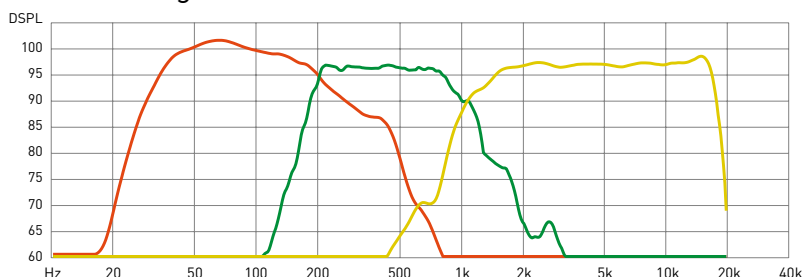

### Phase response

#### Phase

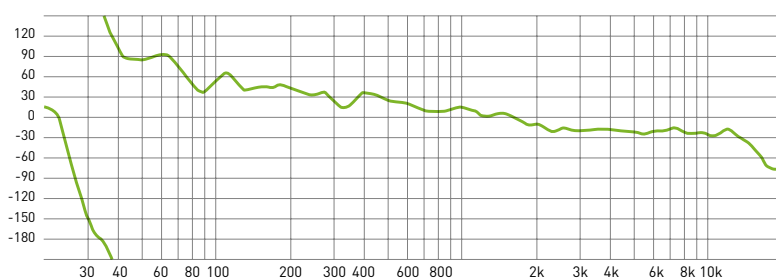

**ProTone**

9 «а» Severnoye Shosse, Krasnoyarsk, Russia.

Tel.: +7 (391) 269-59-40, 269-59-90, www.protone.ru, e-mail: info@protone.ru