




ProTone T28

TOURING SUBWOOFER




Specifications

Speaker component	2x18" 460MM
Frequency Response, Hz -3dB	30-120
Power handling, w(AES)	2600
Sensitivity, db	100
SPL 1m	132
Impedance, ohm	4
Conector	2xNeutrik Speakon NL4
Size HxWxD mm	550x1320x700
Weight. Kg	72
Conector	4xNeutrik Speakon NL4
Size HxWxD mm	650x367x454

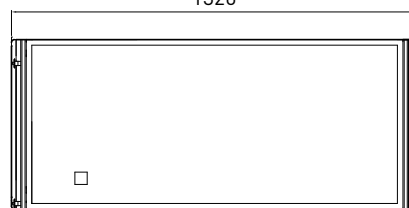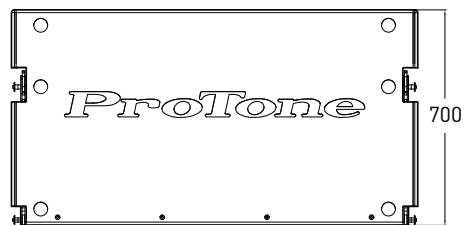

Frequency response

SPL vs Freq

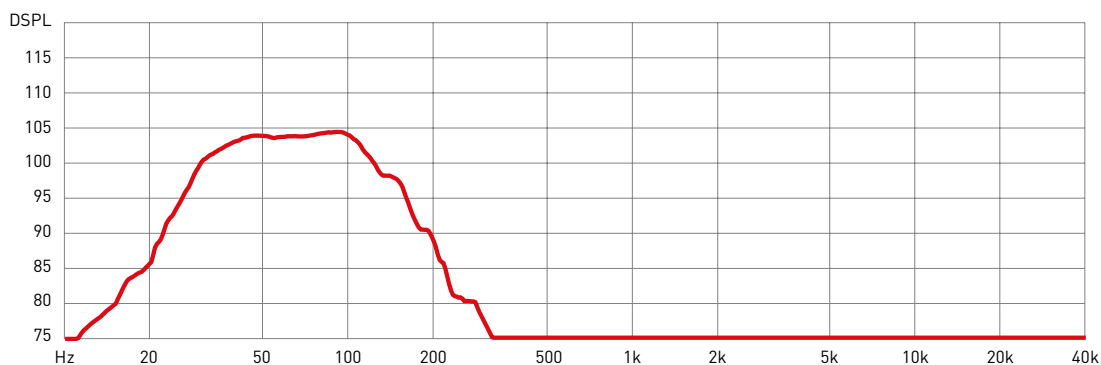

ProTone

9 «а» Severnoye Shosse, Krasnoyarsk, Russia.

Tel.: +7 (391) 269-59-40, 269-59-90, www.protone.ru, e-mail: info@protone.ru