

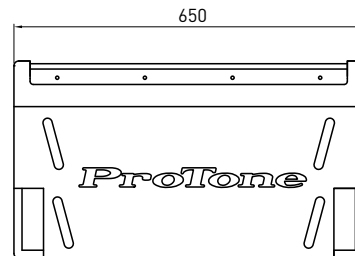


ProTone M15V2

STAGE MONITOR


Specifications

Speaker component	Low 15" 380MM, Hi 3" 75MM
Frequency Response, Hz -3dB	60-18000
Mode	passiv/ bi-amp
Power handling, w(AES)	700/90
Horizontal Coverage	30
Vertical Coverage	70
Sensitivity, db	98/110
SPL 1m	127/129
Impedance, ohm	8/8
Conector	4xNeutrik Speakon NL4
Size HxWxD mm	650x367x454
Weight, kg	19




Frequency response

SPL vs Freq

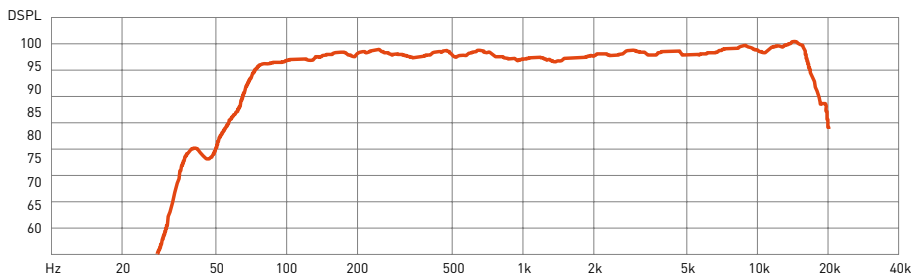

Phase response

Phase

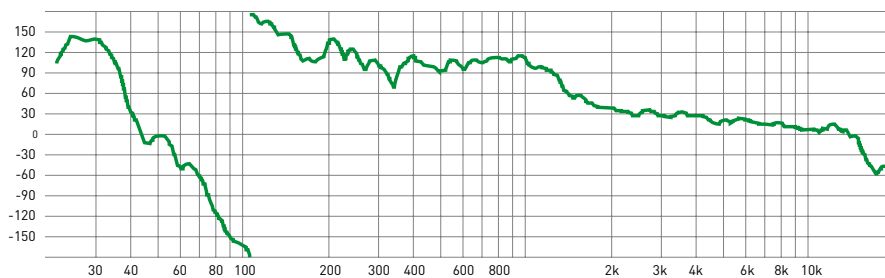

ProTone

9 «а» Severnoye Shosse, Krasnoyarsk, Russia.

Tel.: +7 (391) 269-59-40, 269-59-90, www.protone.ru, e-mail: info@protone.ru